

City of Davis



For publication March 31, 2021 and April 7, 2021

PUBLIC NOTICE

The **City of Davis** will receive sealed bids for a contract to Chip Seal approximately one and eight-tenths (1 8/10) mile of Butterly Road located inside Turner Falls Park.

The scope of work will include building up existing roadway edges, filling potholes with hot mix asphalt then topping with single course oil and chip seal material. Rock chip material will be provided by the City of Davis, contractor is to provide all required machinery and remaining material required to complete the job. Deadline for work to be completed is May 21, 2021.

Contractor site visit and walk through is scheduled for April 9, 2021. All interested contractors should meet at the Headquarters Office inside Turner Falls Park on that day at 1 PM. Bid spec sheets are available at City Hall or on our website www.davisokla.org

Selected contractor will be required to provide certificate of insurance with City of Davis as Certificate Holder with GL limits of \$1,000,000, Auto limits of \$500,000 and WC limits of \$500,000.

Sealed bids will be accepted until 12 Noon on April 23, 2021 at City Hall in Davis, Oklahoma to be opened at 3 PM on April 23, 2021. If mailed, the bids should be mailed to City of Davis, Attn: Chip Seal Bid, 227 E Main St, Davis, OK 73030. Further information may be obtained from the City Clerk/Treasurer at (580) 369-3333 or email treasurer@davisok.city.

Serving the Citizens, Businesses, Employees, and Community Partners of Davis

227 E. Main St Davis, OK 73030 (580) 369-3333

City of Davis, Turner Falls Park Paving Project – Request for Proposal (RFP)

The **City of Davis** will receive sealed bids for contract to Chip Seal approximately one and eight-tenths (1 8/10) mile of Butterly Road located inside Turner Falls Park. The following information relates to the minimum specifications of services, data to be included in the proposal, evaluation criteria, and selected information.

Sealed bids will be accepted until 12 Noon on April 23, 2021 at City Hall in Davis, Oklahoma. Bids are scheduled to be opened at 3 PM on April 23, 2021. If mailed, the bids should be mailed to City of Davis, Attn: Chip Seal Bid, 227 E Main St, Davis, OK 73030. Further information may be obtained from the City Clerk/Treasurer at (580) 369-3333 or email treasurer@davisok.city.

Contractor site visit and walk through is scheduled for 1 pm, April 9, 2021. All interested contractors should meet at the Park Office inside Turner Falls Park on that day at 1 PM.

Scope of the Work. Except as otherwise stipulated herein, the contractor shall furnish all materials, equipment, and labor necessary to complete the work described in this contract; further, it shall be the contractor's sole responsibility to plan for all required material procurement, transportation, and preparation. Any work performed on the approval of anyone other than that specified at the commencement of this contract, will be the sole responsibility of the contractor and not that of the City of Davis.

- Roadway preparation – All potholes will be filled with hot mix asphalt. Existing roadway edges will be built up to provide a clear declination of roadway edge.
- Once roadway preparation has been completed, the road surface will be topped with a single course oil and chip seal material.
- The rock chip material will be provided by the City of Davis and is currently staged on site.
- Except where noted above, the contractor will be responsible for providing all required machinery and remaining material required to complete the job.
- Contractor will be responsible for providing all safety related equipment to include road signage and PPE.

Length of Contract. Project will begin on May 10, 2021 and be completed by May 21, 2021.

Area of Construction. This project is in the city of Davis, within Turner Falls Park located on Highway 77 South of Davis Oklahoma. Construction will begin at and include the intersection of Tucker road and Butterly Road and will span one and one eighth mile covering Butterly Road, Butterly Road loop and back to the intersection of the loop beginning. An area will be designated on site for the contractor to stockpile material, construction equipment and vehicles.

Traffic. No Traffic Control is anticipated for this project as the Road will be closed to traffic by Turner Falls Park Personnel. Before construction begins, coordination with the Turner Falls Park Operations Manager and Turner Falls Park Maintenance Supervisor will be required to avoid any conflict with scheduled activities.

Preparation of Base. Prepare the base as required by the Contract before applying bituminous surface treatment.

- Clean the base of foreign material before placing the prime coat.

- If reconstructing a base previously sealed or patched with bituminous materials, remove areas with excess bituminous materials from the base course surface before applying the bituminous binder.

Bituminous Binder. Uniformly apply the bituminous binder. Delineate one edge of the bituminous surfacing before the first application of bituminous binder. At transverse joints, to prevent double or no bituminous binder application created by operation starts and stops, spread building paper over the treated surface before the joint to ensure the specified distribution of bituminous binder at the nozzles when they reach the untreated surface. Remove and dispose of the paper after starting or restarting the bituminous material application.

- As the road will be closed to traffic and the road, on average, does not exceed 24 feet in width, the bituminous material may be applied to the full width in one pass for each application.

Cover Aggregate. Immediately after applying the bituminous binder, apply cover aggregates as listed in the table below. Uniformly spread the cover material at the specified rates. The City of Davis will allow hand-spreading in areas inaccessible to mechanical spreaders. The City of Davis will provide the aggregate to fulfill the scope of the job and will have said material on site.

Approximate Single Treatment Application Rates				
Material	Aggregate Type			
	LWCA	No. 2	No. 3	No. 3c
Aggregate	100 yd ² /yd ³ (110 m ² /m ³)	25 lb/yd ² (14 kg/m ²)	28 lb/yd ² (15 kg/m ²)	35 lb/yd ² (19 kg/m ²)
Bituminous Binder (residual asphalt)	0.3 gal/yd ² (1.4 L/m ²)	0.3 gal/yd ² (1.4 L/m ²)	0.3 gal/yd ² (1.4 L/m ²)	0.3 gal/yd ² (1.4 L/m ²)

General Application Requirements. A single treatment application will be used. Apply bituminous binder, and spread No. 2, No. 3C, Precoated Aggregates or Light Weight Cover Aggregates (LWCA) cover aggregate at the rates shown. Prevent overlaps, streaks, or gaps in the application of bituminous binder and cover aggregate. Correct overlaps, streaks, and gaps, as approved by the City of Davis at no additional cost to the City of Davis. Ensure the finished surface is free of the following:

- Bleeding
- Loose chips
- Loss of imbedded aggregates


Rolling. Roll the entire surface after each application of cover aggregate and ensure it is firmly imbedded into the bituminous binder. To prevent tracking bituminous binder during rolling, hand spread additional aggregate to fill irregularities and cover bare spots. Perform final rolling of the surface with at least four passes over the entire surface with a pneumatic-type roller at a speed of 7 mph (10 Km/h) or less.

Maintenance. Remove unsatisfactory material. Make repairs with bituminous binder and aggregate, to establish a uniformly dense treatment with maximum retention of the cover aggregate.

- Correct irregularities with additional bituminous binder and aggregate at no additional cost to the City of Davis.
- For excessive bleeding, apply blotting material free of clay, silt, loam, or other foreign matter as directed by the Resident Engineer.

Method of measurement. The Resident Engineer will measure the finished surface area of the Chip Seal Single Treatment complete-in-place. The Resident Engineer will measure the Preparation of Base to the nearest foot (meter) along the centerline when specified on the plans.

Insurance. Prior to commencing work, the CONTRACTOR shall name the City of Davis as a co-insured and file with the City Clerk certificates of insurance evidencing such coverage. Such certificates, or their replacements, shall be continuously on file with the City during the full term of this contract. Selected contractor will be required to provide certificate of insurance with City of Davis as Certificate Holder with GL limits of \$1,000,000, Auto limits of \$500,000 and WC limits of \$500,000.

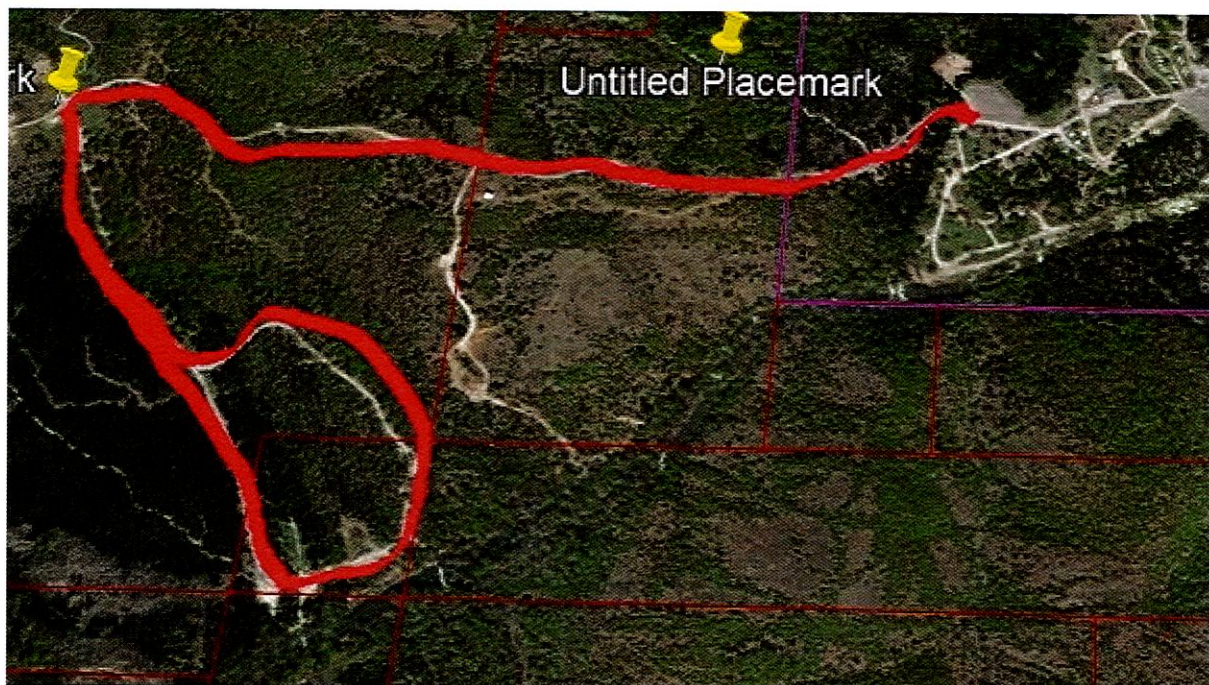

PROPOSAL

Pavers, Inc.
2244 Hwy 77 So
Davis, OK 73030

Proposal No: 202106

Date: 4/23/2021

PROPOSAL SUBMITTED TO:

City of Davis
227 E Main
Davis, OK 73030

WORK TO BE PERFORMED AT:

Turner Falls
Butterly Road
1 8/10 mile Oil & Chip

We hereby propose to furnish the materials (with the exception of the rock chip material that will be provided by the City of Davis and is currently staged on site), equipment and perform the labor necessary for the completion of 1 8/10 miles at various widths of oil & chip on Butterly Road inside Turner Falls Park.

All potholes will be filled with hot mix asphalt. The existing roadway edges will be repaired to provide a clear declination of roadway edge.

A single course of oil (CRS 2+) and chip material (furnished on site by City) will be placed on the existing paved surface of the road. All work to meet ODOT Standard Specifications 2009.

Contractor will be responsible for providing all safety related equipment to include road signage and PPE.

Road will be closed to traffic by Turner Falls Park Personnel.

Project will begin on May 10, 2021 and be completed by May 21, 2021 unless hindered by weather or some other unforeseen constraint. In that case, we will work with Park Management to accommodate the next ten (10) day time frame that works for them.

PRICE \$58,291.20

All testing, Surveying, Staking to be done by Owner. All necessary licenses or permits will be furnished by Owner. Water to be furnished on site by owner. All quantities are estimates based on best available data provided and prices are based on unit pricing only. Prices are firm for only 30 days for the sum of **Fifty eight thousand two hundred ninety one dollars and twenty cents (\$58,291.20)** with payments to be made as follows:

All payments are due with-in 30 days after receipt of invoice. Customer shall be charged the lower of 1.5% interest per month or maximum legal rate on all amounts not received by the due date and shall pay all of Pavers, Inc. reasonable cost (including attorneys' fees) of collecting amounts due but unpaid.

Any alteration or deviation from above specifications involving extra costs will be executed only upon written order, and will become an extra charge over and above the estimate. All agreements contingent upon strikes, accidents, or delays beyond our control.

Respectfully submitted Pavers, Inc.


By: 

Note – This proposal may be withdrawn by us if not accepted within 30 days.

ACCEPTANCE OF PROPOSAL

The above prices, specifications and conditions are satisfactory and are hereby accepted. You are authorized to do the work as specified. Payments will be made as outlined above.

Signature

A handwritten signature in black ink, appearing to be a stylized 'J' or 'K' followed by a horizontal line.

Date

4/21/2021

Signature

Five Star Paving, INC
26042 Hwy 64
Knoxville, AR 72845 US
(479)280-2272
fivestarpavinginc@gmail.com



Estimate

ADDRESS

City Of Davis
227 E Main St
Davis, Oklahoma 73030

ESTIMATE # 1101

DATE 04/21/2021

ACTIVITY	QTY	RATE	AMOUNT
Butterly Rd and Butterly Rd. Loop Sweep road specified Tack coat and pre patch holes with hot mix asphalt Patches edges of road with hot mix asphalt Apply a single layer of chip seal to approx. 1.8 miles and compact. Gravel provided by the city Sweep loose material off after approx. 24 hrs			70,963.20
TOTAL			\$70,963.20

Accepted By

Accepted Date